



DIN 228-A

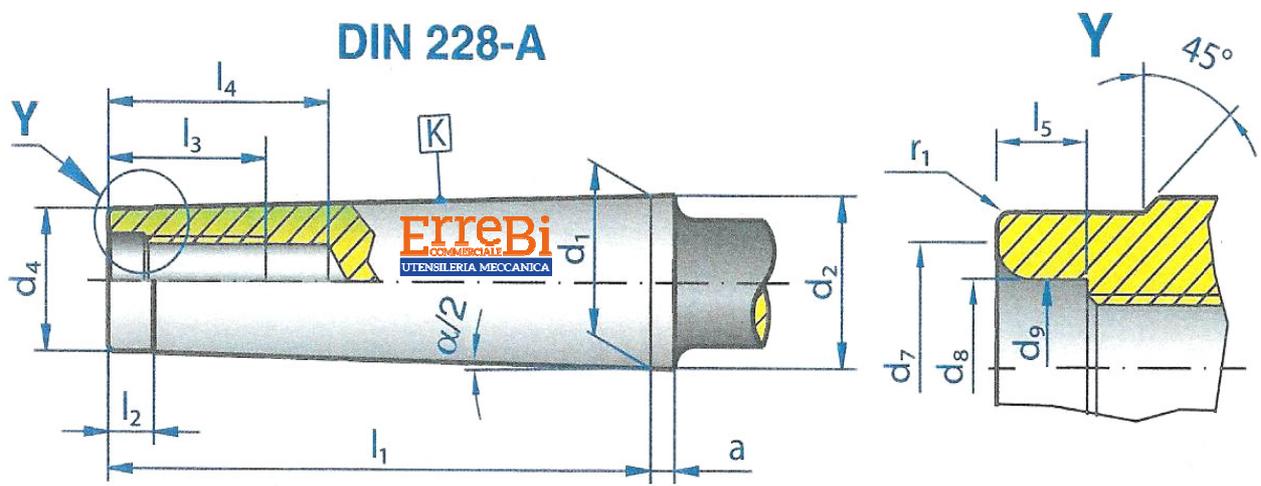

DIN 228-B

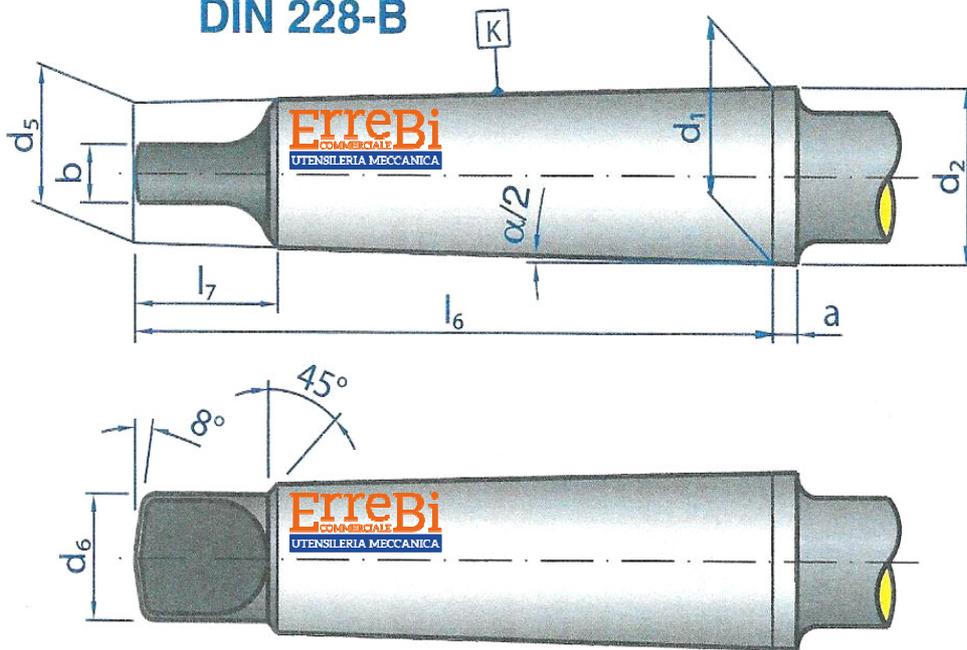

CONO MORSE

K	a	d ₁	d ₂ ≈	d ₄ max	d ₇ max	d ₈	d ₉	l ₁ max	l ₂	l ₃ mín	l ₄ mín	b h13
1	3,5	12,065	12,2	9	8,5	6,4	M 6	53,5	5	16	22	5,2
2	5	17,780	18	14	13,2	10,5	M 10	64	5	24	31,5	6,3
3	5	23,825	24,1	19	16	13	M 12	81	7	24	33,5	7,9
4	6,5	31,267	31,6	25	21,5	17	M 16	102,5	9	32	42,5	11,9
5	6,5	44,399	44,7	35,7	26	21	M 20	129,5	10	40	52,5	15,9
6	8	63,348	63,8	51	32	25	M 24	182	16	47	61,5	19

K	α/2	r ₁	l ₆ 0/-1	l ₇ max	l ₅ +0,5/0	d ₅ ≈	d ₆ max
1	1°25'43"	0,2	62	13,5	4	9	8,7
2	1°25'50"	0,2	75	16	5	14	13,5
3	1°26'16"	0,6	94	20	5,5	19,1	18,5
4	1°29'15"	1	117,5	24	8,2	25,2	24,5
5	1°30'26"	2,5	149,5	29	10	36,5	35,7
6	1°29'36"	4	210	40	11,5	52,4	51